
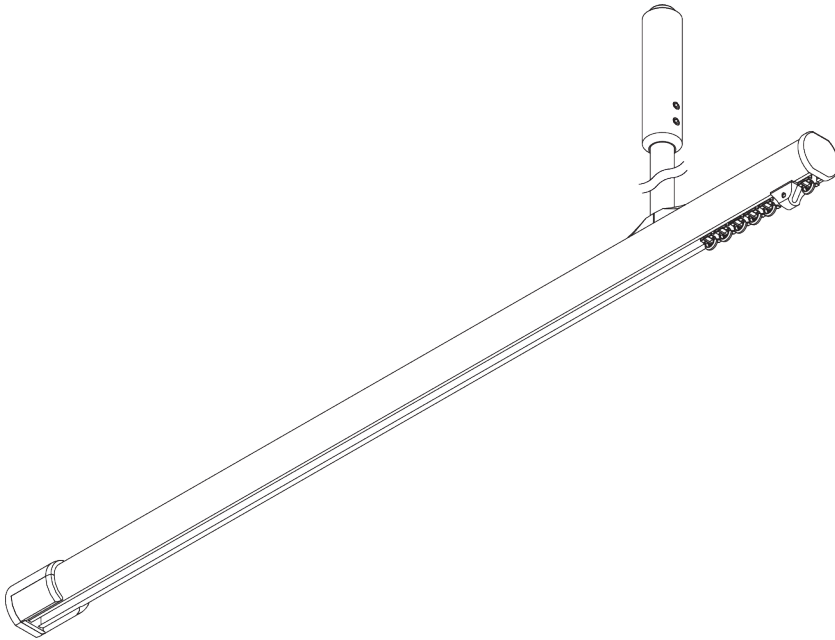


SG 6103



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - L
- **Fitting:** suspended, ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Universal room divider
- 2-component (2C) glider technology
- Wave (2C)
- Suspended
- Versatile layouts
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6103p

Profile



B. HOW TO MEASURE

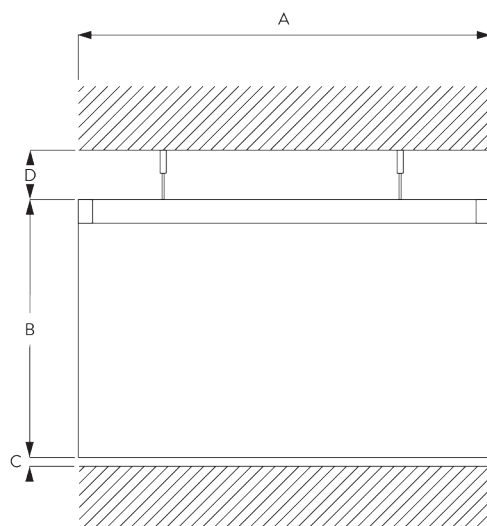

A: System width

B: System height

C: Distance between floor and fabric

D: Distance between ceiling and system

C. SPECIFICATION

TEXT


Silent Gliss SG 6103 Room Divider System. Comprises aluminium profile SG 6103 in satin anodised / white powder coat finish supplied made to measure with standard nylon glider hook SG 6147 at 10/m. Installed with the following parts depending on system configuration: Wall support SG 6620 / Wall bracket SG 6503 / End cover SG 6630 / End stop SG 6007 / External bridge SG 6521/ T-junction SG 6514 / Cross connection SG 6525 / Ceiling fixing plate SG 6138 / Twist fixing plate SG 6124 / Hanger rod SG 6190 / V-hanger rod SG 6501 / dust cover SG6110/ ceiling support SG 6175 / Internal Bridge SG 6635.

FITTING


A. FITTING INFORMATION

Fixing points




For detailed fitting information, visit the Silent Gliss website.



Dust Cover



Site preparation for suspended ceiling applications




- Fixings should support the ends of the profile and any changes in direction.
- Maximum span between fixings is 3000 mm.
- When fitting to suspended ceilings site preparation is critical.
- At each hanger position a noggin in approved material is required above the suspended ceiling; underside to rest on top of ceiling (but independently supported) with a minimum length of 300 mm at right angles to the track in which the hanger occurs to give fixing tolerance.
- Ideally the hangers should be on the return track, if on the front track then adequate support should be provided.
- A detailed information sheet is available on request.


Diagonal fixing supports can be used to return the hanger to the bedhead wall, but only for use when it is impossible to ceiling fix.

B. CEILING FITTING

Hanger SG 6190

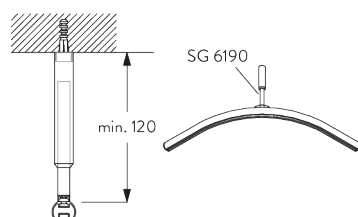



Can also be fixed in suspended ceilings by using sleeves SG 6197, SG 6186, SG 6187, SG 6188.



SG 6190

Hanger



Mini hanger SG 6175



SG 6175

Mini hanger


Bracket SG 6124



SG 6124


Bracket

V-hanger

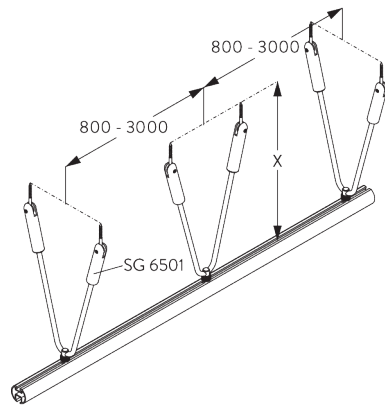


SG 6501:

V-hangers (25°-35°) provide additional lateral stability.




SG 6501

V-Hanger

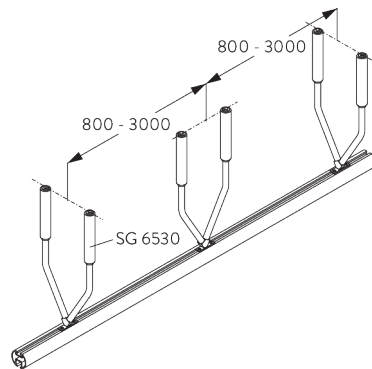

SG 6530:

V-hangers (25°-35°) provide additional lateral stability.




SG 6530


V-Hanger

C. WALL FITTING


Smart Fix



Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10492 (M4x8) needed.




Square Smart Fix with slot SG 11216 - SG 11218:
Screw SG 10492 (M4x8) needed.

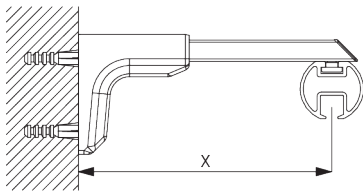

Universal Smart Fix SG 11154 - SG 11156:
Screw SG 11131 (M4x6) needed.

Smart Fix	X mm
SG 11206 / SG 11216	33-51
SG 11207 / SG 11217	53-71
SG 11208 / SG 11218	73-91
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210




SG 6117
Slot nut




SG 10492
Pan head screw M4x8




SG 11131
Pan head screw with flange
M4x6




SG 11206
Smart Fix with slot 60 mm




SG 11207
Smart Fix with slot 80 mm




SG 11208
Smart Fix with slot 100 mm




SG 11216
Square Smart Fix with slot 60
mm




SG 11217
Square Smart Fix with slot 80
mm




SG 11218
Square Smart Fix with slot
100 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

Bracket SG 6503



Bracket SG 6503 is available in various sizes, enquire at Silent Gliss.





SG 6503

Bracket


D. WALL SUPPORT

Bracket SG 6620




SG 6123

Connection plate



SG 6620

Wall bracket





SG 6631


Connection piece

E. PROFILE JUNCTIONS

Connection bridge SG 6521

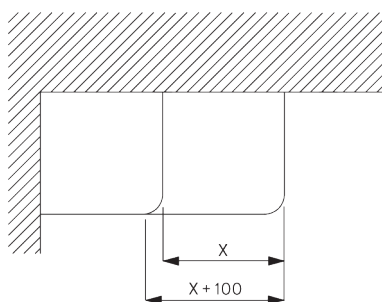



Note: be sure to attach a sketch!



SG 6521

Connection bridge

**Connection set
SG 6635**




SG 6635


Connection bridge set

SYSTEM OPTIONS


A. LAYOUT OPTIONS



A: Hanger rod
B: Wall support




A: Hanger rod
B: Wall support

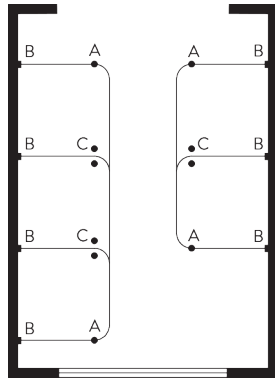


A: Hanger rod
B: Wall support
C: V-hanger

B. WAVE



SG 11295




SG 11302

Standard components:

- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm




SG 2255



SG 6364




SG 6365




SG 6366

Optional components:

- SG 2255 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm




SG 10430-34




SG 11303



SG 3582



SG 6349



SG 6363

Curtain components:



- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight



SG 10075



SG 10076

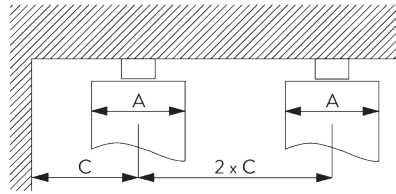

A = Stack depth
B = Stack size
C = Min. distance

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

*Stack size B when using optional extension arm SG 6364
increases by 95 mm per curtain stack!

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting



- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety














- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.


PARTS

A. STANDARD PARTS


	SG 6065 End stop
	SG 6086 Spring stop
	SG 6103p Profile
	SG 6143 Glider on strip
	SG 6190 Hanger
	SG 6620 Wall bracket
	SG 6630 End cover

B. OPTIONAL PARTS

	SG 2255 Brake		SG 6175 Mini hanger
	SG 3582 Hook		SG 6186 Sleeve
	SG 3599 Hook		SG 6187 Sleeve
	SG 6064 End stop		SG 6196 Double hanger
	SG 6075 End stop with hook		SG 6283 Roller
	SG 6094 Roller		SG 6349 Wave curtain tape
	SG 6098 Roller		SG 6363 Wave top hemming tape
	SG 6110 Dust cover		SG 6364 Wave extension
	SG 6117 Slot nut		SG 6365 Wave hanger
	SG 6124 Bracket		SG 6366 Wave carrier for draw rod
	SG 6125 Corner connection piece		SG 6501 V-Hanger
	SG 6138 Bracket		SG 6514 T-Junction
	SG 6146 Hook		SG 6521 Connection bridge
	SG 6147 Glider with hook on strip		SG 6530 V-Hanger

**SG 6631**


Connection piece

**SG 6635**


Connection bridge set

**SG 10075**


Lead weight 50 g/m

**SG 10076**


Fabric weight

**SG 10430**


Draw rod 50 cm

**SG 10431**


Draw rod 75 cm

**SG 10432**

Draw rod 100 cm

**SG 10433**


Draw rod 125 cm

**SG 10434**


Draw rod 150 cm

**SG 10492**


Pan head screw M4x8

**SG 11131**

Pan head screw with flange M4x6

**SG 11154**


Universal Smart Fix 120 mm

**SG 11155**

Universal Smart Fix 150 mm

**SG 11156**

Universal Smart Fix 200 mm

**SG 11206**

Smart Fix with slot 60 mm

**SG 11207**

Smart Fix with slot 80 mm

**SG 11208**

Smart Fix with slot 100 mm

**SG 11216**

Square Smart Fix with slot 60 mm

**SG 11217**

Square Smart Fix with slot 80 mm

**SG 11218**

Square Smart Fix with slot 100 mm

**SG 11295**

End stop

**SG 11302**

Wave 2C glider cord 80 mm

**SG 11303**

Wave 2C glider cord 60 mm