
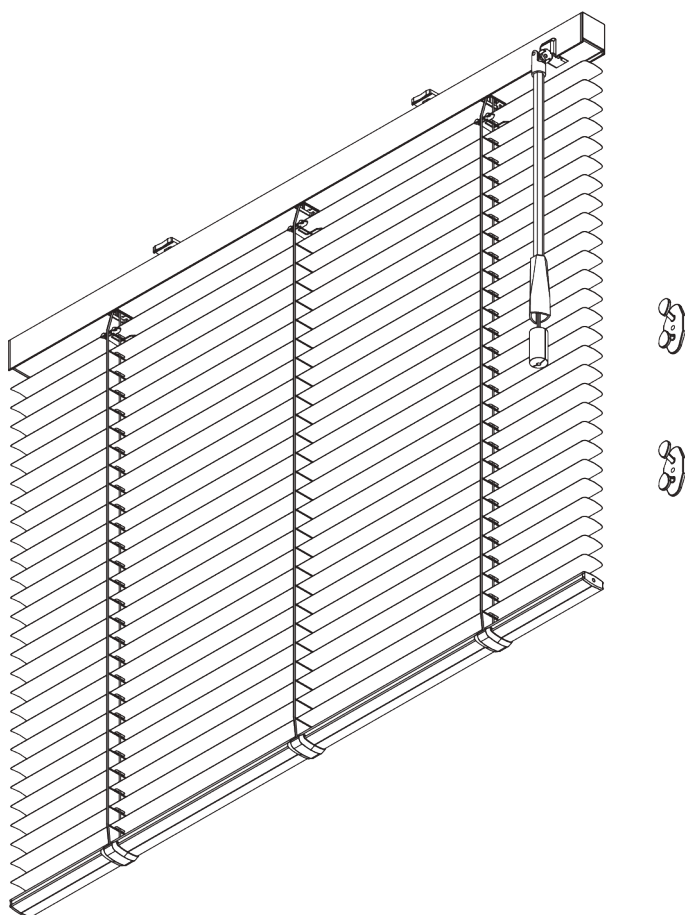


SG 8110



PRODUCT INFORMATION


- **Operation** control wand
- **Range:** S - M
- **Fitting:** ceiling, wall
- **Colours:** refer to Silent Gliss slat collection

Features:


- Optimised light control
- Convenient turning of the slats using the control wand
- Multifunctional control wand
- Slat width: 25 mm (standard), 16 mm
- Privacy control (PC)

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



25 mm slats: 3 m
16 mm slats: 2.5 m



28 cm




25 mm slats: 5 m
16 mm slats: 2.5 m



25 mm slats: 7 m²
16 mm slats: 5 m²


Slat stack heights

												
			50	100	150	200	250	300	350	400	450	500
	25 mm (PC)	X	7	9	11	13	15	17	18	20	21	23
16 mm	X	7	9	11	13	15						


(cm)

B. PROFILE


Profile information



SG 10037
Profile



SG 8003
Bottom bar 16 mm




SG 8004
Bottom bar 24 mm



SG 8120
Shaft

C. HOW TO MEASURE

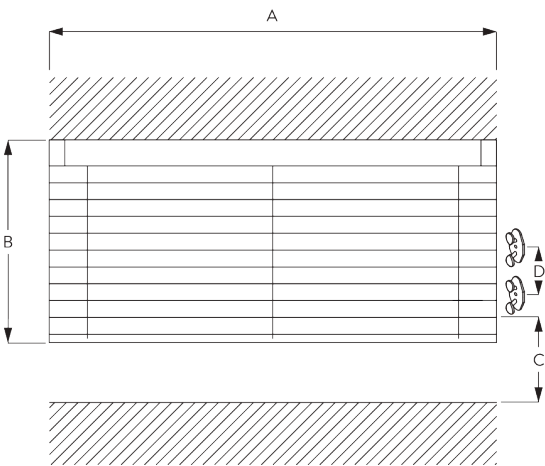

A: System width
B: System height
C: Cleats SG 10742 min. 150 cm above floor
D: 7 - 35 cm depending on system height

D. SPECIFICATION

TEXT


Silent Gliss SG 8110 / SG 8110PC Wand Operated Venetian Blind System. Supplied made to measure and complete comprising aluminium headrail SG 10037. Dual operation with control wand including breakaway cord connector which combines tilt/raise/lowering of slats, left or right-hand operation with various wand lengths available. Integrated brake ensures precise and controlled lowering. Click mechanism ensures slats snap securely into the closed position avoiding gradual re-opening of slats. SG 8110PC version (25mm slats only) features concealed slat punching. System fixed with snap on brackets SG 10101 to ceiling / wall at 800-1000mm intervals plus one 50mm from each end. Optional side-guide wires available for sloped applications up to 15° incline from vertical. Compliant to Child Safety Legislation EN13120 when used in conjunction with cleats SG 10742 and break away cord connector SG 10748. Slat to be chosen from Silent Gliss 16mm or 25mm range, Price Group 1 / 2 / 3.

FITTING


A. FITTING INFORMATION

Fixing points

For detailed fitting information, visit the Silent Gliss website.





Side-by-side fitting

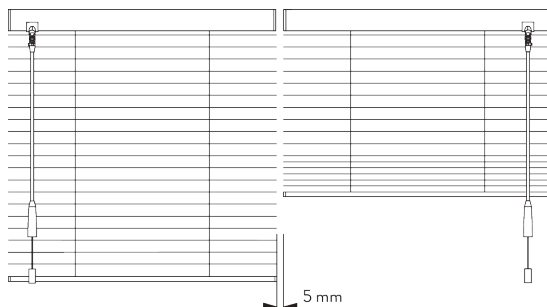

Min. distance: 5 mm

B. CEILING FITTING

Bracket SG 10101




SG 10101


Bracket

C. WALL FITTING


Smart Fix




Smart Fix SG 11200 - SG 11201 and bracket SG 10101:
Screw SG 10395 (M4x6) needed.



Square Smart Fix SG 11210 - SG 11211
and bracket SG 10101:
Screw SG 10395 (M4x6) needed.

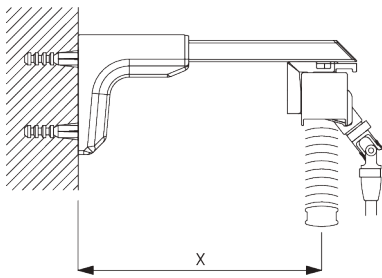

Universal Smart Fix SG 11154 - SG 11156
and bracket SG 10101:
Screw SG 10407 (M4x10) needed.




SG 10101
Bracket




SG 10395
Pan head screw M4x6




SG 10407
Pan head screw M4x10




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm



SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11154
Universal Smart Fix 120 mm

Smart Fix	X mm
SG 11200 / SG 11210	57-59
SG 11201 / SG 11211	77-79
SG 11154	107-135
SG 11155	137-165
SG 11156	187-215





SG 11155
Universal Smart Fix 150 mm






SG 11156
Universal Smart Fix 200 mm

Bracket SG 10101




SG 10101
Bracket


D. FITTING WITH SIDE GUIDE OPTION




SG 8235
Side guide wire base short




SG 8236
Side guide wire base long



SG 8237
Side guide wire holder




SG 8241
Side guide eyelet



SG 8249

Side guide device




SG 10120

Side guide wire $\varnothing$ 0.9 mm


SYSTEM OPTIONS

A. PRIVACY CONTROL (PC)

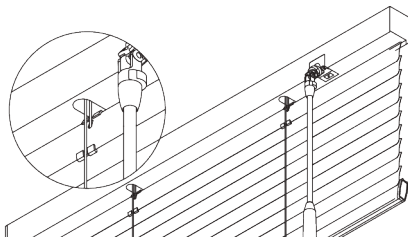

To avoid direct light ingress when slats are closed.
For 25 mm slats only. Not applicable with side guides.

B. SIDE GUIDES

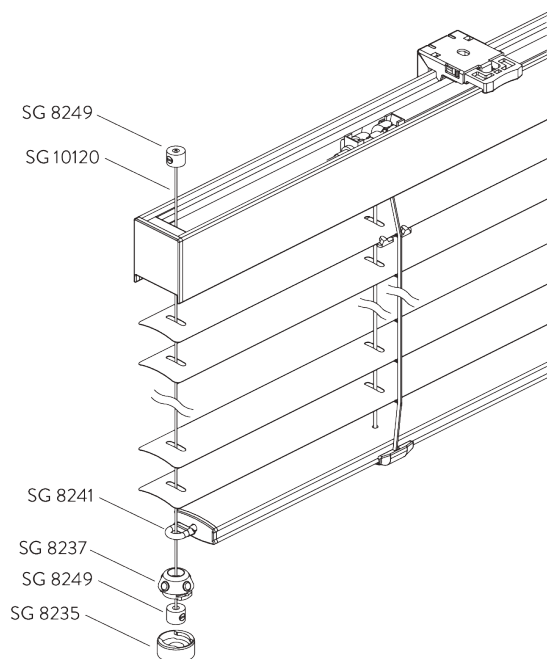

Additional parts:

- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 2x SG 8241 Side guide eyelet
- 4x SG 8249 Side guide device
- 2x SG 10120 Side guide wire $\varnothing$ 0.9 mm

Note:

- Up to 15° from vertical

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.

Fitting











- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, slate type, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!






Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.







PARTS














A. STANDARD PARTS

	SG 8004 Bottom bar 24 mm
	SG 8007 Slat 25 mm
	SG 8011 Lift cord ø 1.2 mm
	SG 8013 Bottom clip 25 mm
	SG 8120 Shaft
	SG 8239 End cover 25 mm
	SG 10037 Profile
	SG 10077 End cover
	SG 10081 Shaft stop
	SG 10086 Tilter holder without pulley
	SG 10087 Tilter holder with pulley
	SG 10088 Tilter
	SG 10101 Bracket
	SG 10104 Slat clip 25 mm

	SG 10117 Ladder cord 25 mm
	SG 10742 Child safety cord cleat
	SG 10748 Child safety break away cord connector
	SG 10898 Child safety cord bush
	SG 11491 Gear box
	SG 11492 Gear box cover
	SG 11496 Control wand 680 mm
	SG 11509 Cord stop
	SG 11510 Cord stop cover
	SG 11511 Tilter holder with pulley
	SG 11512 Cord end cap

B. OPTIONAL PARTS

	SG 8003 Bottom bar 16 mm
	SG 8006 Slat 16 mm
	SG 8012 Bottom clip 16 mm
	SG 8109 Slat clip 25 mm
	SG 8148 Projection block
	SG 8235 Side guide wire base short
	SG 8236 Side guide wire base long
	SG 8237 Side guide wire holder
	SG 8238 End cover 16 mm
	SG 8241 Side guide eyelet
	SG 8249 Side guide device
	SG 10109 Slat clip 16 mm
	SG 10116 Ladder cord 16 mm
	SG 10118 Ladder cord 25 mm PC

	SG 10120 Side guide wire ø 0.9 mm		SG 11498 Control wand 1080 mm
	SG 10395 Pan head screw M4x6		SG 11499 Control wand 1280 mm
	SG 10407 Pan head screw M4x10		SG 11501 Extension 900 mm
	SG 10745 Child safety break away cord connector		SG 11505 Control wand for extension 580 mm
	SG 11154 Universal Smart Fix 120 mm		SG 11506 Control wand for extension 780 mm
	SG 11155 Universal Smart Fix 150 mm		SG 11516 Wedge
	SG 11156 Universal Smart Fix 200 mm		
	SG 11200 Smart Fix 60 mm		
	SG 11201 Smart Fix 80 mm		
	SG 11210 Square Smart Fix 60 mm		
	SG 11211 Square Smart Fix 80 mm		
	SG 11494 Control wand 320 mm		
	SG 11495 Control wand 480 mm		
	SG 11497 Control wand 880 mm		

