



Hand Operated Curtain Track Systems





Hand Operated Curtain Track System

Silent Gliss® 1080

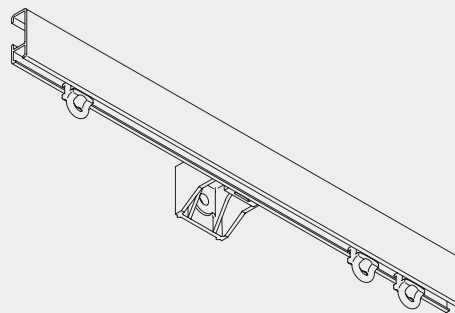


Product Information

- Versatile, sturdy hand-operated curtain track for domestic or contract use
- For medium weight curtains
- Elegant, particularly suited for deep curtain headings
- Standard colours: silver, brushed aluminium, white, gold, antique bronze, black and cream. Gold and brown brackets are available, otherwise use white
- Standard lengths: 5m (silver and white only), 6m (all colours). Profile connector for longer lengths
- Easy ceiling or wall fixing or can be suspended from hanger rods
- Wide variety of accessories for professional fitters
- Profile also used as picture hanging system and for pelmet/valance rails
- Can be bent



1080

Profile, Bending and Specification Information



Standard radius 100mm
Arch radius 300mm.

Standard radius is recommended for optimal operation. Minimum possible radius is 60mm.

Specification guide - download from www.silentgliss.co.uk (password protected).

Silent Gliss 1080 curtain track, hand drawn, anodised aluminium complete with gliders 3533 at 16/m, 2 endcover/stops 3667 per length. Face fixed with nylon bracket 3630 each screwed to timber/plugged and screwed to blockwork/concrete at 600mm centres.Lm. Bronze, gold and silver profile anodised aluminium. All other coloured track, powder coated finish.

Fitting Information

Bracket positioning and fixing with universal brackets 3603, 3630, 3655, 3660





The fixing distances are meant as a guide only: they may vary in practice depending on surface and curtain weight.



Installation: Roll track onto bracket in direction indicated
Removal: 1. Press to release 2. Rotate forward for removal

Fitting Options


Ceiling fix with bracket 3603

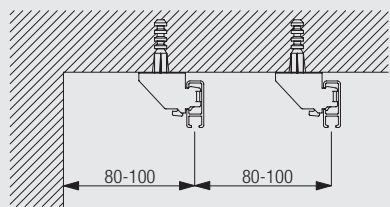


3603
Top fix bracket

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.


Ceiling fix with bracket 3603 and bracket arms 3272 - 3274

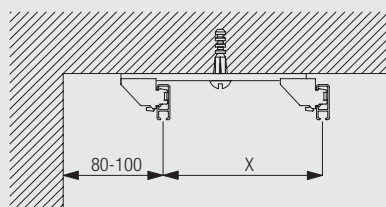

	X (mm)
3272	52
3273	75
3274	105




3272-74
Bracket arm




3603
Top fix bracket

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.


Suspended fix with bracket 3603 and hanger rod system 3639

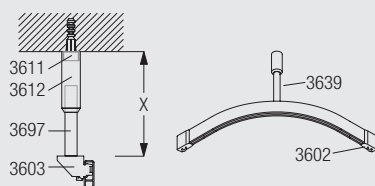


	X (m)
3639	1.25 max



3639
Hanger assembly
(complete)




3603
Top fix bracket




3602
Wall support


Wall fix with universal brackets 3630/3655/3660




	X (mm)
3630	33
3655	48
3660	63



3630
Bracket



3655
Long universal
bracket




3660
Extra long universal
bracket




1080


Wall fitting with Smart Fix 11200-11205 and bracket 3603



	X (mm)
11200	70
11201	90
11202	110
11203	130
11204	160
11205	210




11200-05
Smart Fix (60-200
mm)



3603
Top fix bracket


Brackets feature thread for screw SG 10492 (M4x8) for fixing bracket SG 3603.

Wall fitting with Square Smart Fix 11210-11215 and bracket 3603

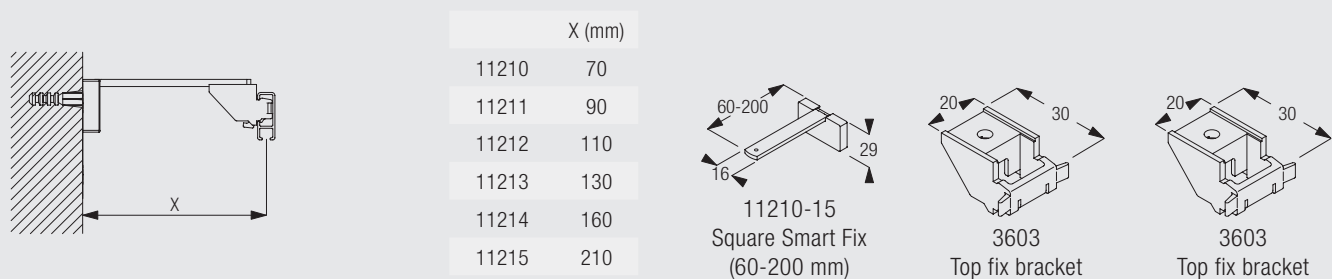

Brackets feature thread for screw SG 10492 (M4x8) for fixing bracket SG 3603.

Wall fitting with Universal Smart Fix 11154-11156 and bracket 3603

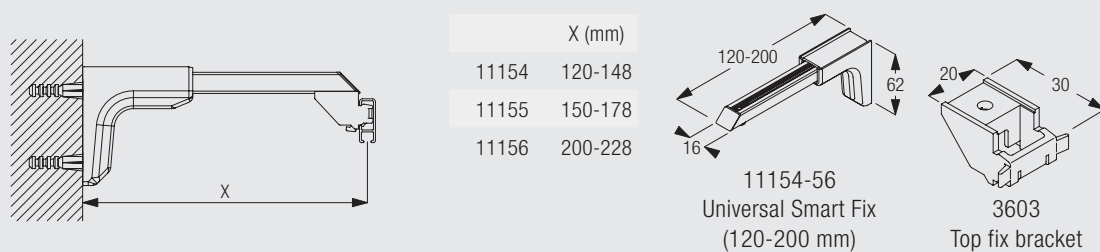

Brackets feature thread for screw SG 10277 (M4x12) for fixing bracket SG 3603.

Standard Accessories

1080

18R Screw 25mm. No. 8 roundhead

1080 Profile

3534 Glider 3533 in strip form

3630 Bracket

3667 Endcover (32mm)

Optional Accessories

0516 Pelmet spacer

3016 Endstop

3017 Endstop

3070 Twist eye endstop

3071 Screw twist endstop

















3533 Glider

3548 Retrofit glider

3570 Rotating glider

3602 Wall support

3603 Top fix bracket

3604	Corner piece		3606	Snap fastener	
3618	Wall support		3620	Connecting bridge	
3626	Return fixing bracket		3630	Bracket	
3638	Re-inforced corner piece for pelmets		3655	Long universal bracket	
10430	Draw rod with hook, 50cm		10430	Draw rod with hook, 50cm	
10431	Draw rod with hook, 75cm		10431	Draw rod with hook, 75cm	
10432	Draw rod with hook, 100cm		10432	Draw rod with hook, 100cm	
10433	Draw rod with hook, 125cm		10433	Draw rod with hook, 125cm	
10434	Draw rod with hook, 150cm		10434	Draw rod with hook, 150cm	
11154	Universal Smart Fix, 120 mm set		11155	Universal Smart Fix, 150 mm set	
11156	Universal Smart Fix, 200 mm set		11200	Smart Fix, 60 mm set	
11201	Smart Fix, 80 mm set		11202	Smart Fix, 100 mm set	
11203	Smart Fix, 120 mm set		11204	Smart Fix, 150 mm set	
11205	Smart Fix, 200 mm set		11210	Square Smart Fix, 60 mm set	
11211	Square Smart Fix, 80 mm set		11212	Square Smart Fix, 100 mm set	
11213	Square Smart Fix, 120 mm set		11214	Square Smart Fix, 150 mm set	
11215	Square Smart Fix, 200 mm set				
Sets					
3639	Hanger rod assembly		3697	Rod	1 

3611 Stud 1



3612 Support with screw 1



3699 Track insert 1



Useful Information and Sewing Accessories





Diagram uses standard 3533/3534 glider and is measured to the inside of the glider eye. For optional gliders substitute dimensions below:
3570 = 6.0mm
3548 = 7.5mm

3562 Standard tape



3582 Hook



6146 Hook



3571 Hook




3599 Hook




1080

Useful Measurements

0516 Pelmet spacer



3620 Connecting bridge





1080





1080

www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com