


Silent Gliss®

1090 Hand Drawn Curtain Track Fitting Instructions

1090 can be face fixed or top fixed and fitted in parallel.


Face Fix with bracket 3175

Brackets should be spaced evenly at no more than 45cm intervals.




Top Fix with bracket 3176


Brackets should be spaced evenly at no more than 45cm intervals.



To fit the track, simply push on as shown.

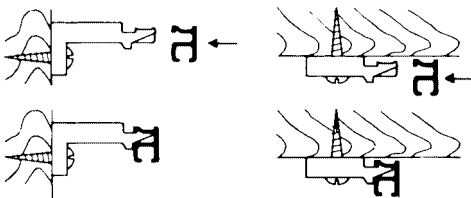


To remove the track, insert screwdriver as shown and twist.



Dual system – tracks in parallel

Use the metal spacers 3113 or 3115 to evenly space two lengths of 1090 and to fix both tracks to the ceiling. A spacer should be fixed at intervals no greater than 45cm along the tracks. A white spacer cover 3255/3256 gives a final neat appearance. Remember to allow sufficient clearance between the first track and the wall (at least 50cm).

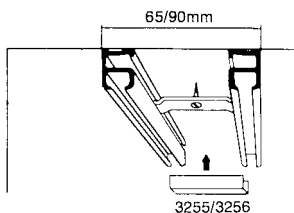

Silent Gliss Limited

Star Lane, Margate, Kent CT9 4EF, England
Telephone: 01843 863571 Fax: 01843 864503
E-mail: info@silentgliss.co.uk www.silentgliss.co.uk

