


Skylight Shading Systems





Crank Operated Wintergarden System

Silent Gliss® 2190

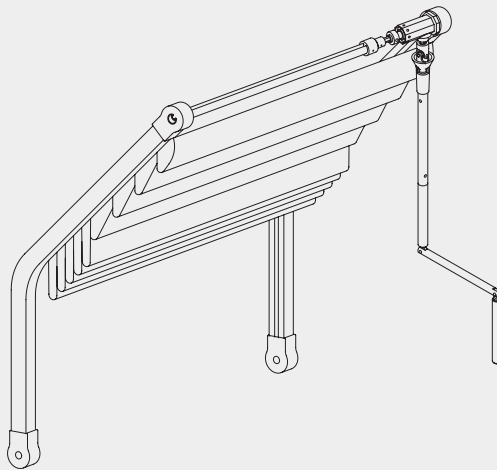

Product Information


- Crank operated system for domestic or contract use
- Pleasing Roman blind effect with Silent Gliss technical or decorative fabrics or customers' own material
- Side guide profile standard colours: silver, white, bronze, gold and black
- Crank may be detached for security
- Left or right hand operation
- Horizontal, sloping, bent and arched applications



2190

Profile, Bending and Specification Information

Side guide profile



2191



Min. radius 200mm

Specification Information - download from www.silentgliss.co.uk (password required).

2190 crank operated Wintergarden system ready assembled complete with drive shaft, crank handle, 2191 side guide channels and side fixed with 3825 clamps at 30cm centres.off.....wide xdrop (girth) guide channels, side channels each benttimes with cross rods atcm intervals.

System Dimensions



2.5m (single)
3m (double)



6m (single and double)



10kg



15sqm (single)
18sqm (double)

Max. size and weight chart


2190		kg max.	A	B	2190		kg max.	A	B
		10	1.8 m	6 m			10	2 m	5 m
		10	1.8 m	6 m			10	2 m	5 m
		10	2 m	5 m			10	2 m	5 m
		10	2 m	5 m			10	2 m	4 m
		10	2.5 m	6 m			10	2 m	4 m
		10	3 m	6 m			10	2 m	4 m

The system dimensions depend on the application, number of connected systems and the total fabric weight (including cross rods, 2579 - 0.146kg per m, 2248 - 0.32kg per m).

When a full arch the system must be centre opening.

System Options

Connected systems




Maximum of two bays can be connected with one crank operation. The maximum system sizes are indicated in the chart under system dimensions.

Please note that the two sections can be asymmetrical but one section can never exceed a total width of 2.5 m.


Fitting Information

Bracket positioning

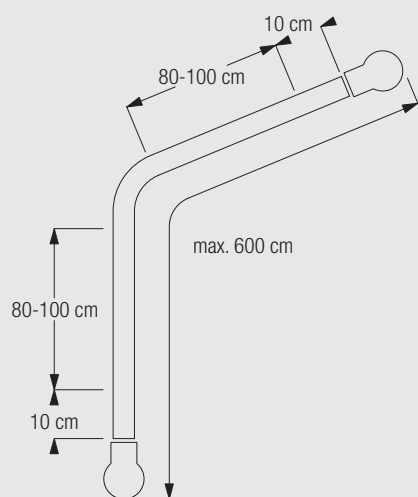

Please fix the last bracket as close as possible (max. 10cm) to the guide returns.

Fixing the end of the fabric

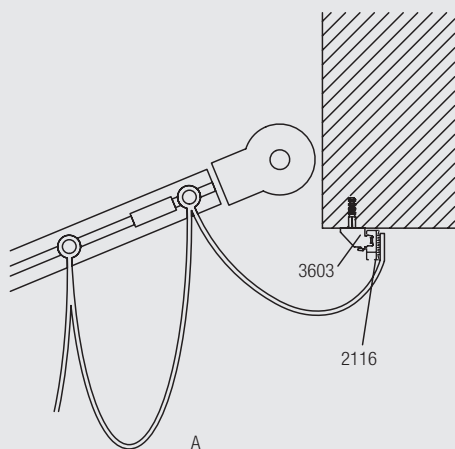




Fixing of fabric to Velcro profile 2116



2190




Fitting Options

Inside reveal fix with clamp 3825





3825
Clamp (35mm)

Outside reveal fix with clamp 3065a



3065A
Bracket - single
clamp

Outside reveal fix with clamp 3066a and 3066b (double system)



Accessories



2190

2116 Velcro profile



2156 Drive shaft



2242 Connector



2746 Detachable crank handle



3603 Top fix bracket



6086 Spring stop




3065B Bracket - double clamp



2111 Hexagonal bar



2145 Glider



2191 Profile



2248 Heavy duty cross rod



2759 Crossrod



3825 Clamp (35mm)




3065A Bracket - single clamp




Useful Measurements

2111 Hexagonal bar



2156 Drive shaft



2190

www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com